



### 6.3 Rollen DIN 8166/8169 für Förderketten DIN 8165/8167/8168

Rollen für Förderketten DIN 8165	DIN 8166	Blatt 1/1
----------------------------------	----------	-----------

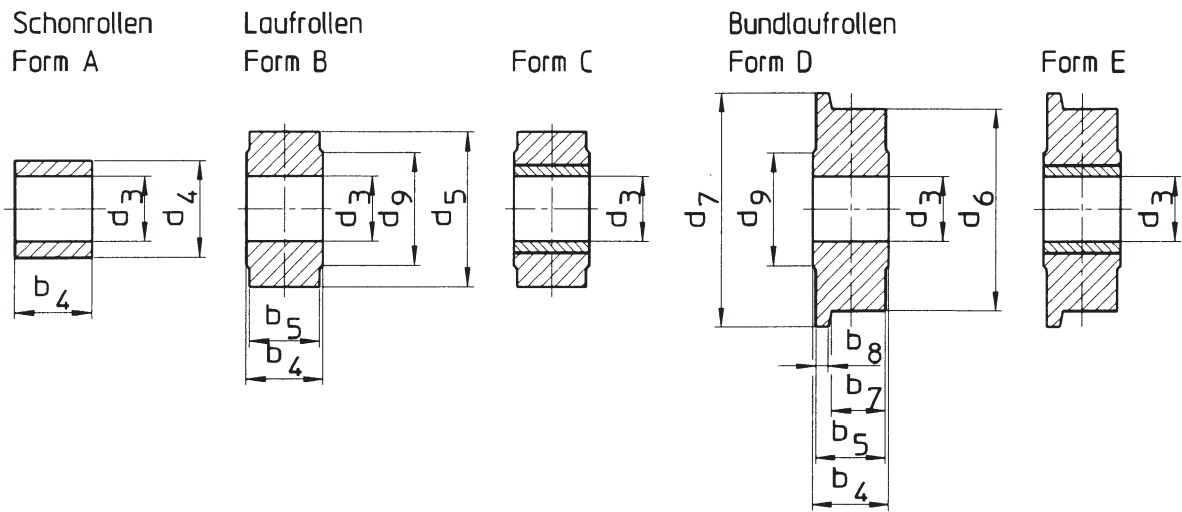

DIN-Ketten-Nr.	Breitenmaße				Durchmesser						Gewicht	
	b <sub>4</sub> max.	b <sub>5</sub> max.	b <sub>7</sub> max.	b <sub>8</sub> max.	d <sub>3</sub> max.	d <sub>4</sub> max.	d <sub>5</sub> max.	d <sub>6</sub> max.	d <sub>7</sub> max.	d <sub>9</sub> =	Rolle	Bundlaufrolle
	mm										kg	
FV 40	17	16	12,0	3,0	15,1	20	32	40	48	26	0,081	0,167
FV 63	21	20	15,0	4,0	18,1	26	40	50	60	30	0,160	0,322
FV 90	24	23	18,0	4,0	20,1	30	48	63	73	35	0,274	0,579
FV 112	29	28	21,5	5,0	22,2	32	55	72	87	40	0,444	0,946
FV 140	34	32	25,0	5,5	26,2	36	60	80	95	45	0,591	1,349
FV 180	44	42	34,0	6,5	30,2	42	70	100	120	50	1,052	2,732
FV 250	54	50	40,0	8,0	36,2	50	80	125	145	60	1,625	5,259
FV 315	64	60	48,0	10,0	42,2	60	90	140	170	70	2,415	7,950
FV 400	68	64	52,0	10,0	44,2	60	100	150	185	70	3,248	9,732
FV 500	78	72	57,0	12,0	50,2	70	110	160	195	80	4,396	12,733
FV 630	88	80	62,0	14,0	56,2	80	120	170	210	100	5,882	16,575

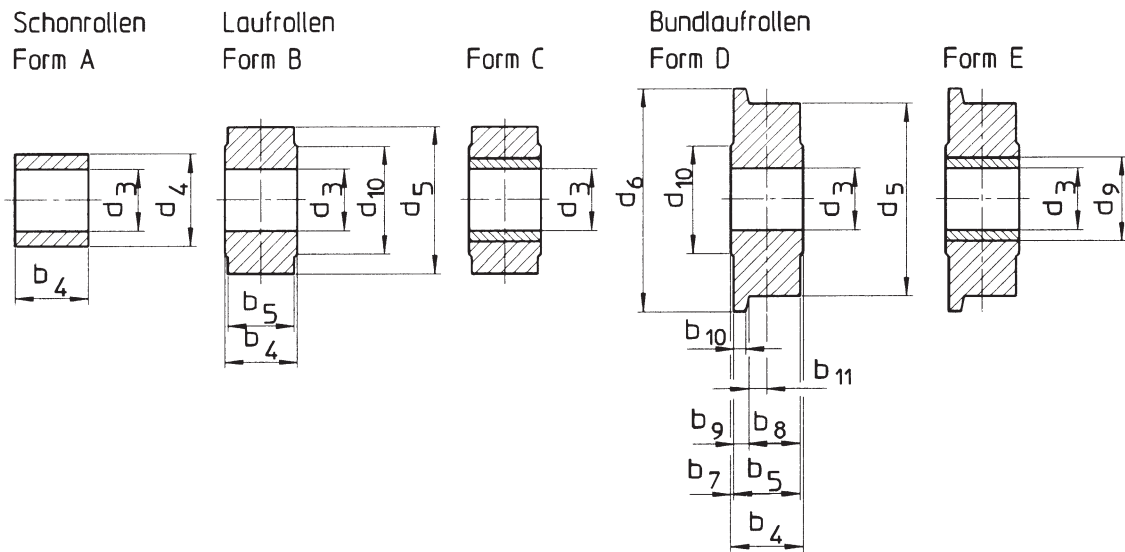

DIN-Ketten-Nr.	Breitenmaße							Durchmesser					Gewicht	
	b <sub>4</sub>	b <sub>5</sub>	b <sub>7</sub>	b <sub>8</sub>	b <sub>9</sub>	b <sub>10</sub>	b <sub>11</sub>	d <sub>3</sub> C11	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	d <sub>9</sub> max.	Rolle	Bund-laufrolle
	mm													kg
M 20	15	14	0,5	11,0	3,0	2,5	4,0	9,0	12,5	25	30	---	0,048	0,053
M 28	17	16	0,5	12,5	3,5	3,0	4,5	10,0	15,0	30	36	---	0,081	0,089
M 40	19	18	0,5	13,5	4,5	3,5	4,5	12,5	18,0	36	42	---	0,129	0,142
M 56	23	22	0,5	17,0	5,0	4,0	6,0	15,0	21,0	42	50	---	0,213	0,234
M 80	27	26	0,5	20,0	6,0	5,0	7,0	18,0	25,0	50	60	---	0,354	0,392
M 112	31	29	1,0	22,0	7,0	6,0	7,5	21,0	30,0	60	70	30	0,579	0,632
M 160	36	34	1,0	25,5	8,5	7,0	8,5	25,0	36,0	70	85	34	0,919	1,032
M 224	42	40	1,0	30,0	10,0	8,0	10,0	30,0	42,0	85	100	40	1,593	1,753
M 315	47	45	1,0	33,0	12,0	10,0	10,5	36,0	50,0	100	120	46	2,443	2,745
M 450	55	51	2,0	37,0	14,0	12,0	11,5	42,0	60,0	120	140	54	4,051	4,471
M 630	65	61	2,0	45,0	16,0	13,5	14,5	50,0	70,0	140	170	65	6,548	7,389
M 900	76	70	3,0	52,0	18,0	15,0	17,0	60,0	85,0	170	210	75	11,233	12,755
MC 28	19	18	0,5	13,5	4,5	3,5	4,5	17,5	25,0	36	42	---	0,112	0,124
MC 56	23	22	0,5	17,0	5,0	4,0	6,0	21,0	30,0	50	60	---	0,284	0,315
MC 112	31	29	1,0	22,0	7,0	6,0	7,5	29,0	42,0	70	85	38	0,746	0,837
MC 224	42	40	1,0	30,0	10,0	8,0	10,0	41,0	60,0	100	120	52	2,091	2,339